



FOAM NITRILE PALM COATING

From the TONS range, with good abrasion resistance and oil grip.

FEATURES

- › Durable foam nitrile palm coating grips in dry, damp and light oily conditions
- › Flexible and close-fitting design for a comfortable wearing experience
- › Lightweight and breathable materials
- › Knitwrist cuff style



SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Mechanical Handling
- Logistics
- Servicing
- Transportation

Suitable Applications

- Assembly
- Final Fix
- Goods Handling
- Handling Mildly Abrasive Surfaces
- Light Fabrication
- Supervision

CERTIFICATION



See overleaf for explanation

**PRODUCTION INFORMATION**

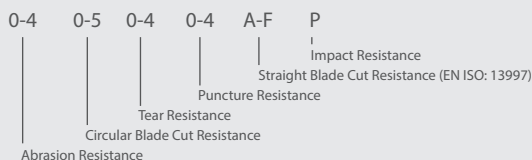
| | | |
|--------------------|------------------------|-------------------------|
| MATERIALS | LINER: | 15 gauge nylon, spandex |
| | COATING: | Foam nitrile |
| COLOUR | Grey / Black | |
| LENGTH (mm) | 250 (size dependent) | |
| CUFF STYLE | Elasticated knit wrist | |

ORDERING DETAILS

| SIZE | CODE | PACKAGING |
|--------|---------|--------------------|
| 6/XS | TNS0100 | 10 pairs per bag |
| 7/S | TNS0101 | |
| 8/M | TNS0102 | 120 pairs per case |
| 9/L | TNS0103 | |
| 10/XL | TNS0104 | |
| 11/XXL | TNS0105 | |

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

ANSI/ISEA 105-2016 ABRASION RATING CHART

| Abrasion Level Rating | 0 | 1 | 2 | 3 | 4 | 5 | 6 |
|-------------------------|------|------|------|--------|--------|---------|---------|
| Gram Load | 500 | 500 | 500 | 500 | 1000 | 1000 | 1000 |
| Abrasion Cycles to Fail | <100 | ≥100 | ≥500 | ≥1,000 | ≥3,000 | ≥10,000 | ≥20,000 |

ANSI/ISEA PUNCTURE RESISTANCE

| ANSI Puncture Level | Puncture Resistance (newtons) |
|---------------------|-------------------------------|
| 1 | 10-19 |
| 2 | 20-59 |
| 3 | 60-99 |
| 4 | 100-149 |
| 5 | 150+ |

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS**EUROPE**

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Centre, Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Notified Body No. 0321)